

31,5"

Touch monitor

DG3150-0010-C810-B0

Open Frame Touch Monitor

Application

- Self service
- Healthcare
- Gaming
- Industrial automation




Features

1. Integrated design with better stability and reliability.
2. Capacitive touchscreen for premium image quality and support 10-point touch.
3. 89°(h) x 89°(v) visible angle, no matter mounted in landscape or portrait, also have optimal clarity and the viewing experience.
4. High-definition LCD displays offer superior high-definition interactivity, clarity and resolution.
5. 2-year warranty.



FRONT VIEW

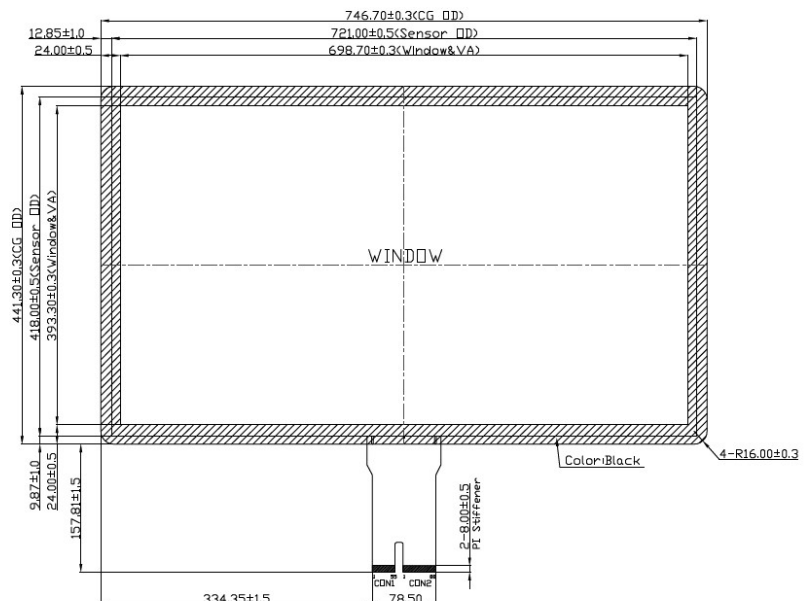

Specifications

Part number	DG3150-0010-C810-B0
Enclosure color	Black
Active area	698.40mm (H) x 392.85mm (V) / 27.50" x 15.47"
Diagonal	31.5 inch
Aspect Ratio	16:9
Resolution	1920(H) ×1080(V)
Other Supported Resolutions	640x480 60Hz; 720x400 60Hz; 800x500, 60Hz; 800x600 60Hz; 1024x768 60Hz; 1280x800; 60Hz; 1280x1024 60Hz; 1366x768 60Hz, 60Hz RB; 1440x900 60Hz, 60Hz RB; 1680x1050 60Hz, 60Hz RB
Number of Colors	16.7M
Brightness (typical)	LCD panel: 350 nits
Response Time (typical)	10ms
Viewing Angle 89°(H)	89°(V)
Contrast Ratio	1200:1
On Screen Display	Accessible through switches on the unit's tethered OSD Control box. Controls: Menu, Up, Down, Select, Power Settings: Brightness, Contrast, Clock, Phase, H-position, V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD timeout, OSD Language, OSD H-Position, OSD V-Position, Information Languages: English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese, Russian, Korean"
I/O Ports	Mini-USB, RJ45 for OSD remote key, VGA, HDMI, Display Port, 24V D/C in
Input Video	Mini-USB, RJ45 for OSD remote key, VGA, HDMI, Display Port, 24V D/C in
Format&Frequency	Vertical: 48 – 62.5Hz
Power Supply	External DC : Input Voltage: 24VDC +/-5%(4PIN-HRB-RAST5.0 Piercing IDC Connector)
Power Consumption (Typical)	ON (Default - 80% Brightness): 20W SLEEP FROM PC (monitor + adapter): 0.4W OFF (monitor + adapter): 0.3W"
Temperature	Operating : 0°C ~ 40°C (32°F ~ 104°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)
Humidity	Operating: 20% - 80%RH; Storage: 10% - 95%RH
Weight	Unpackaged: 11.00 kg; Packaged: 12.8 kg
Shipping Box Dimensions	870mm (L) x 120 mm (W) x 570 mm (H)
Mounting Options	200x200mm VESA mount on rear of unit. 2 Hole mounting interface on all four sides. Flush mount with included brackets.
Compliance	ESD:15 kV air / 8 kV contact ESD compliant IK08 impact compliant
Warranty	2-year
MTBF	50,000h
Regulatory approvals and declarations	CE or other according to customer requirements HDMI cable, VGA cable, OSD remote, OSD cable, Touch USB cable, Power cable.
Accessory for options	Quick Install Guide, "L" (Side Mount) Brackets and w/Screws"