

31,5"

Touch monitor



DGI3151-0026-C81

Close Frame Touch Monitor



Multi-touch



with FRAME

PCAP

Application

- Self service
- Healthcare
- Gaming
- Industrial automation



Features


1. Integrated design with better stability and reliability.

2. Capacitive touchscreen for premium image quality and support 10-point touch.

3. 89°(h) x 89°(v) visible angle, no matter mounted in landscape or portrait, also have optimal clarity and the viewing experience.

4. High-definition LCD displays offer superior high-definition interactivity, clarity and resolution.

5. 2-year warranty.

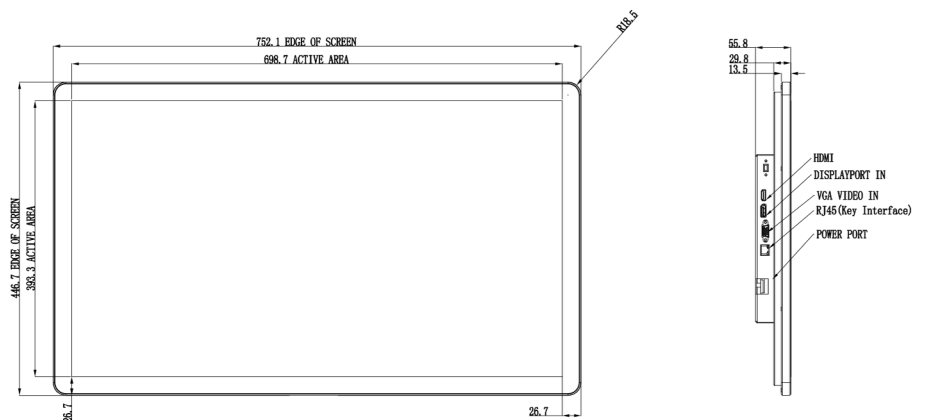

Specifications

| | |
|---------------------------------------|---|
| Part number | DGI3151-0026-C81 |
| Enclosure color | Black |
| Active area | 698.40mm (H) x 392.85mm (V) / 27.50" x 15.47" |
| Diagonal | 31.5 inch |
| Aspect Ratio | 16:9 |
| Resolution | 1920(H) ×1080(V) |
| Other Supported Resolutions | 640x480 60Hz; 720x400 60Hz; 800x500, 60Hz; 800x600 60Hz; 1024x768 60Hz; 1280x800; 60Hz; 1280x1024 60Hz; 1366x768 60Hz, 60Hz RB; 1440x900 60Hz, 60Hz RB; 1680x1050 60Hz, 60Hz RB |
| Number of Colors | 16.7M |
| Brightness (typical) | LCD panel: 350 nits |
| Response Time (typical) | 10ms |
| Viewing Angle 89°(H) | 89°(V) |
| Contrast Ratio | 1200:1 |
| On Screen Display | Accessible through switches on the unit's tethered OSD Control box. Controls: Menu, Up, Down, Select, Power Settings: Brightness, Contrast, Clock, Phase, H-position, V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD timeout, OSD Language, OSD H-Position, OSD V-Position, Information Languages: English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese, Russian, Korean" |
| I/O Ports | Mini-USB, RJ45 for OSD remote key, VGA, HDMI, Display Port, 24V D/C in |
| Input Video | Mini-USB, RJ45 for OSD remote key, VGA, HDMI, Display Port, 24V D/C in |
| Format&Frequency | Vertical: 48 – 62.5Hz |
| Power Supply | External DC : Input Voltage: 24VDC +/-5%(4PIN-HRB-RAST5.0 Piercing IDC Connector) |
| Power Consumption (Typical) | ON (Default - 80% Brightness): 20W SLEEP FROM PC (monitor + adapter): 0.4W OFF (monitor + adapter): 0.3W" |
| Temperature | Operating : 0°C ~ 40°C (32°F ~ 104°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F) |
| Humidity | Operating: 20% - 80%RH; Storage: 10% - 95%RH |
| Weight | Unpackaged: 11.00 kg; Packaged: 12.8 kg |
| Shipping Box Dimensions | 870mm (L) x 120 mm (W) x 570 mm (H) |
| Mounting Options | 200x200mm VESA mount on rear of unit. 2 Hole mounting interface on all four sides. Flush mount with included brackets. |
| Compliance | ESD:15 kV air / 8 kV contact ESD compliant IK08 impact compliant |
| Warranty | 2-year |
| MTBF | 50,000h |
| Regulatory approvals and declarations | CE or other according to customer requirements HDMI cable, VGA cable, OSD remote, OSD cable, Touch USB cable, Power cable. |
| Accessory for options | Quick Install Guide, "L" (Side Mount) Brackets and w/Screws" |