

DG1561-0096-C810-B0

15.6" Closed Frame Touch Monitor



Multi-Touch

Aluminum Frame

PCAP




Application

- Self service
- Gaming
- Healthcare
- Industrial automation

Features

1. Integrated design with better stability and reliability.
2. Capacitive touchscreen for premium image quality and support 10-point touch.
3. 170°(h) x 170°(v) visible angle, no matter mounted in landscape or portrait, also have optimal clarity and the viewing experience.
4. High-definition LCD displays offer superior high-definition interactivity, clarity and resolution.
5. 2-year warranty.

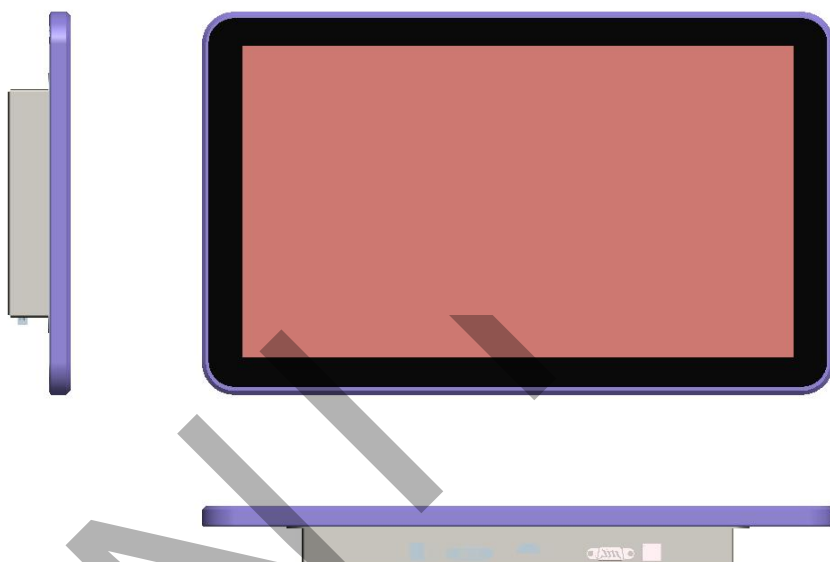

Specifications	
Part number	DG1561-0096-C810-B0
Enclosure color	Black
Active area	344.16mm (H) x 193.59mm (V) / 13.54" x 7.62"
Diagonal Size	15.6 inch
Aspect Ratio	16:10
Resolution	1920(H)×1080(V)
Other Supported Resolutions	800x600; 1024x768
Number of Colors	16.7M
Brightness (typical)	LCD panel: 250 nits
Response Time (typical)	20ms
Viewing Angle	170° (H) x 170° (V)
Contrast Ratio	800:1
On Screen Display	Accessible through switches on the unit's tethered OSD Control box. Controls: ON/OFF, SELECT, RIGHT, LEFT, MENU, AUTO or EXIT Picture: Brightness, Contrast, Black-equalizer, Game Mode OSD Setting: H.Position, V.Position, Menu Time, Transparency Temperature: Temperature, Red, Green, Blue Option: Source, Language, Aspect Ratio, Volume Reset: Reset, Auto Color Adjust, Auto Image Adjust Information: Input information Languages: Simplified Chinese, English, German, French, Italian, Spanish, Russian, Japanese, Korean, Traditional Chinese
I/O Ports	Serial port (IntelliTouch only), USB Type B, OSD Key, VGA, HDMI, Mic, 12V D/C in
Input Video Format&Frequency	HDMI V1.3 Type A receptacle for HDMI input Analog VGA on Female DB-15 connector
Power Supply	External DC - Optional Power Supply (Sold separately) Input voltage: 12VDC +/- 5%
Power Consumption (Typical)	ON (Default - 80% Brightness): 8W SLEEP FROM PC (monitor + adapter): 0.3W OFF (monitor + adapter): 0.2W
Temperature	Operating: 0°C ~ 50°C (32°F ~ 122°F) (≤80%RH on 50°C) Storage: -20°C ~ 60°C (-4°F ~ 140°F) (≤39%RH on 60°C)
Humidity	Operating: 20% - 80%RH Storage: 5% - 95%RH (≤40%RH on 95%RH)
Weight	Unpackaged: TBD Kg Packaged: TBD Kg
Product Dimensions	395.50 mm (L) x 239.50 mm (W) x 39.00 mm (H)
Shipping Box Dimensions	TBD mm (L) x TBD mm (W) x TBD mm (H)
Mounting Options	Flush mount with included brackets.
Compliance	ESD: 15 kV air / 8 kV contact ESD compliant IK07 impact compliant
Warranty	2-year
MTBF	15,000h
Regulatory approvals and declarations	CE or other according to customer requirements

Accessory for options

HDMI cable, VGA cable, Touch USB cable, DC-Power, Quick Install Guide
“L” (Side Mount) Brackets and w/Screws

DIGNITY

Dignity reserve the right to change or update products and documentation, and have the right to terminate or restrict the production and sale of products without prior notice.

Foshan Shunde Dignity Electronic Technology Co.,Ltd

No.8, Chaoguang Mid-Road, Xiao Huangpu, Ronggui, Shunde,
Foshan, Guangdong, China

Tel: +86 757 2668 7241

Fax: +86 757 2668 1196

<http://www.dignity.com.cn>

