

# 21,5"

## RGB Led Touch Monitor



### DG2156-0157-C814-B0

Close Frame RGB Led Touch Monitor



Multi-touch



with FRAME

PCAP


## Application

- Self service
- Healthcare
- Gaming
- Industrial automation



## Features


1. Integrated design with better stability and reliability.
2. Capacitive touchscreen for premium image quality and support 10-point touch.
3. 178°(h) x 178°(v) visible angle, no matter mounted in landscape or portrait, also have optimal clarity and the viewing experience.
4. A RGB light strip surrounds the edges of the machine.
5. High-definition LCD displays offer superior high-definition interactivity, clarity and resolution.
6. 2-year warranty.

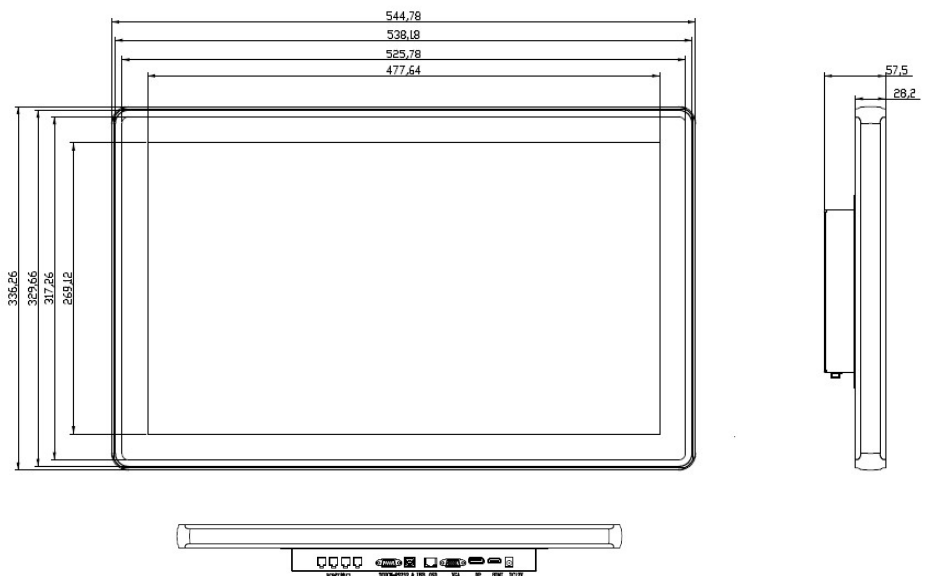

\*Monitor Compatible with O/S, Windows / Android / Linux

\*Monitor available in touch and non-touch versions, from 21,5" to 43"

## Specifications

Part number	DG2156-0157-C814-B0																								
Enclosure color	Black																								
Active area	476.64mm (H) x 268.11mm (V) / 18.76" x 10.55"																								
Diagonal Size	21.5 inch																								
Aspect Ratio	16:9																								
Resolution	1920(H) × 1080(V)																								
Other Supported Resolutions	640x480 60Hz; 720x400 60Hz; 800x500, 60Hz; 800x600 60Hz; 1024x768 60Hz; 1280x800 60Hz; 1280x1024 60Hz; 1366x768 60Hz, 60Hz RB; 1440x900 60Hz, 60Hz RB; 1680x1050 60Hz, 60Hz RB;																								
Number of Colors	16.7M																								
Brightness (typical)	LCD panel: 300 nits																								
Response Time (typical)	7ms																								
Viewing Angle	178° (H) ; 178° (V)																								
Contrast Ratio	3000:1																								
RGB Light Strip	A RGB light strip on the each sides of the machine																								
On Screen Display	<p>Accessible through switches on the unit' s tethered OSD Control box.</p> <p>Controls: Menu, Up, Down, Select, Power</p> <p>Settings: Brightness, Contrast, Clock, Phase, H-position, V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD timeout, OSD Language, OSD H-Position, OSD V-Position,Information</p> <p>Languages: English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese, Russian, Korean</p>																								
I/O Ports	Serial port (IntelliTouch only), USB Type B, RJ45 for OSD remote key, VGA, HDMI, Display Port, Four RGB Light Ports, 12V D/C in																								
Input Video Format&Frequency	<p>HDMI V1.3 Type A receptacle for HDMI input</p> <p>Analog VGA on Female DB-15 connector</p> <p>DisplayPort V1.1a - Supports later versions of DisplayPort video input</p> <p>Horizontal: 46 - 83 KHz</p> <p>Vertical: 48 - 76 Hz</p>																								
RGB Light Strip Port Definition	<p>Connector Mode: C3030-2X02AW(5557-3.0-4P Double row 90 degree curved needle)</p> <table border="1"> <thead> <tr> <th colspan="2">Connector 1<sup>1</sup></th> <th colspan="2">Connector 2</th> <th colspan="2">Connector 3</th> <th colspan="2">Connector 4<sup>2</sup></th> </tr> </thead> <tbody> <tr> <td>④(GND)</td> <td>③(NC)</td> <td>④(NC)</td> <td>③(NC)</td> <td>④(NC)</td> <td>③(NC)</td> <td>④(GND)</td> <td>③(NC)</td> </tr> <tr> <td>②(DI)</td> <td>①(12V)</td> <td>②(NC)</td> <td>①(NC)</td> <td>②(NC)</td> <td>①(NC)</td> <td>②(NC)</td> <td>①(12V)</td> </tr> </tbody> </table>  <p>Note1:The pin of the connector 1 is input port of the RGB light strip</p> <p>Note2:The 12V and GND pin of all connectors must be connected to controller's 12V and GND</p>	Connector 1 <sup>1</sup>		Connector 2		Connector 3		Connector 4 <sup>2</sup>		④(GND)	③(NC)	④(NC)	③(NC)	④(NC)	③(NC)	④(GND)	③(NC)	②(DI)	①(12V)	②(NC)	①(NC)	②(NC)	①(NC)	②(NC)	①(12V)
Connector 1 <sup>1</sup>		Connector 2		Connector 3		Connector 4 <sup>2</sup>																			
④(GND)	③(NC)	④(NC)	③(NC)	④(NC)	③(NC)	④(GND)	③(NC)																		
②(DI)	①(12V)	②(NC)	①(NC)	②(NC)	①(NC)	②(NC)	①(12V)																		
Power Supply	External DC - Optional power brick (sold separately)																								

	<p>Input voltage range: 100-240 VAC  Input frequency: 50-60 Hz  Output Voltage: 12VDC +/- 5%  RGB Input Voltage: 12VDC</p>
Power Consumption (Typical)	<p>ON (Default - 80% Brightness): TBD W  SLEEP FROM PC (monitor + adapter): 0.3W  OFF (monitor + adapter): 0.2W  RGB Strip:Max TBD W</p>
Temperature	<p>Operating : 0°C ~ 40°C (32°F ~ 104°F);  Storage: -20°C ~ 60°C (-4°F ~ 140°F)</p>
Humidity	<p>Operating: 20% - 80%RH; Storage: 5% - 90%RH</p>
Weight	<p>Unpackaged: TBD kg; Packaged: TBD kg</p>
Product Dimensions	<p>544.8 mm (L) x 336.3 mm (W) x 57.5 mm (H)</p>
Shipping Box Dimensions	<p>665 mm (L) x 400 mm (W) x 90 mm (H)</p>
Mounting Options	<p>100x100mm VESA mount on rear of unit.  2 Hole mounting interface on all four sides.  Flush mount with included brackets.</p>
Compliance	<p>ESD:15 kV air / 8 kV contact ESD compliant  IK08 impact compliant</p>
Warranty	<p>2-year</p>
MTBF	<p>30,000h</p>
Regulatory approvals and declarations	<p>CE or other according to customer requirements</p>
Accessory for options	<p>HDMI cable, VGA cable, OSD remote, Touch USB cable, OSD cable, DC-Power, Quick Install Guide, RGB cable, RGB remote “L” (Side Mount) Brackets and w/Screws</p>